

# COBALT / BASALT

## Technical details

Manufacturing method	Tufted
Pile type	Looppile
Special treatment Kleenaway	Yes
Dyeing method	Solution dyed
Pile content	100 % polyamide
Gauge	1/10
Backing	Bitumen with glasfiberscrim
Pile weight	ca 550 gr/m <sup>2</sup>
Pile height	ca 3,5 mm
Total Thickness	ca. 6,5 mm
Total weight	ca 4300 gr/m <sup>2</sup>
Tuft density	ca. 164 000 /m <sup>2</sup>
Dimension	50 x 50 cm
Flammability classification	Bfl S1 according to EN13501-1
Electrostatic properties	Walking Test ≤ 2,0 KV Resistance ≤ 10 <sup>9</sup>
Sound absorption rate	α <sub>w</sub> - ca 0,15 acc. to ISO 354
Suitability	EN1307 - 33 - Heavy Commercial
Castor chair suitability	Class A according to EN 985: 2001 Test A
Impact Sound Insulation	ΔL - 31,5 dB at 1000 Hz acc. ISO 10140-1 ΔL <sub>w</sub> - 25 dB acc. ISO 10140-1
Colour fastness :	To light > 7 according to ISO 105B02 To rubbing > 4 according to ISO 105-X12
Bleach resistance	Yes

## Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with B55325. Chair mats are recommended for use under castor chairs.


All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

## Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".


The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.



also available on roll

## Installation

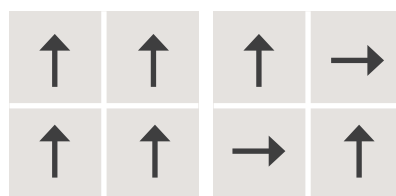

16

EN 1307

Manufactured by: TAPIBEL nv.  
Industrielaan 4 - B-3900 Overpelt

DOP 000423-002 - EN 14041  
DOP 000518T-002 - EN 14041

COBALT / BASALT TILES

For use as floor covering in buildings (EN 14041) according to the manufacturer's specifications



LEED®

Requirements fulfilled  
Report 441633-01

AbZ: Z-156.601-1467

www.incati.be - sales@incati.be

Tel: +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium

**INCATI**  
Innovative Carpet Tiles  
by TAPIBEL