

LINEA TILES



Caractéristiques	Technische Daten	Technical details	
Mode de fabrication	Herstellungsart	Manufacturing method	Tufted
Aspect	Art des Flors	Pile type	Looppile
Traité BAYGARD	BAYGARD imprégné	Special treatment BAYGARD	Yes
Type de teinture	Art der Färbung	Dyeing method	Solution dyed
Surface	Polmaterial	Pile content	50 % PA Solution dyed + 50 % PA Solution dyed space
Jauge	Teilung	Gauge	1/10
Dossier	Rücken	Backing	Bitumen with glasfiberscrim
Poids du velours	Poleinsatzgewicht	Pile weight	ca 580 gr/m ²
Hauteur du velours	Polhöhe	Pile height	ca 2,5 mm
Epaisseur totale	Gesamtdicke	Total Thickness	ca. 5,7 mm
Poids total :	Gesamtgewicht :	Total weight :	ca 4400 gr/m ²
Nombre de points	Polnoppenzahl	Tuft density	ca. 168000 /m ²
Dimension	Dimension	Dimension	50 x 50 cm
Classement feu	Brennverhalten	Flammability classification	Bfl S1 according to EN13501-1
Classement antistatique	Antistatisches Verhalten	Electrostatic properties	Walking Test ≤ 2,0 KV Resistance ≤ 10 ⁹
Domaine d'usage	Einsatzbereich	Suitability	EN1307 - 33 - Heavy Commercial
Application fauteuil roulant	Stuhlleneignung	Castor chair suitability	Class A according to EN 985: 2001 Test A
Isolation phonique	Trittschalldämmung	Sound absorption	22dB ISO 140-8
Solidité des coloris :	Farbechtheit :	Colour fastness :	
Lumière	Lichtechtheit	To light	≥ 7 according to ISO 105B02
Frottement	Reibechtheit	To rubbing	≥ 4 according to ISO 105-X12

Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.


This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.

All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "watermarking". The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.


We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.

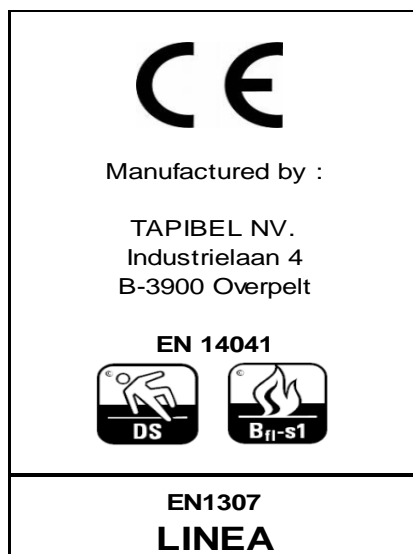

DIBt - Allgemeine bauaufsichtliche Zulassung Nr. Z-156.601-1010



Pose des dalles :
Verlegung :
Installation :

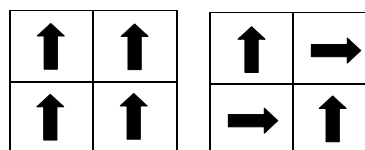

Classement antistatique : IBM/ICL $\leq 5,00 \times 10^{10}$
at 40% RH at 20°C